


IN THE BOX

Make sure you have everything shown here.



Wireless Module

GENERAL INFO

Use of this starter kit will make your Ascent unit ready to add to an Ascent Link wireless mesh network.



The following products are compatible with Ascent Link:

Ascent X1, Ascent X2, Ascent M3, Ascent M8, Ascent K2 (all models), Ascent C2, Ascent C4

INSTALLATION

1. Power off Ascent unit.



CAUTION! Ascent unit power must be off. Failure to power off unit can result in damage to Ascent unit and Wireless Module.

2. Unlock and open faceplate or door (depending on model).
3. Locate installation location for Wireless Module on 30-522 or 30-524 circuit board (depending on Ascent model) (**See Figures 1 and 2**).
4. Install Wireless Module as shown. Line up pins of Wireless Module with headers on circuit board and press gently until module is fully seated.
5. Connect and secure available antenna cable marked by blue label (**See Figure 3**).

NOTE: If your Ascent unit does not have the wireless module installation location on the circuit board or the available antenna cable, please contact us.

SETUP

See **Install Guide** that came with your Ascent Link product for information on setting up a wireless-mesh network for your Ascent product(s).

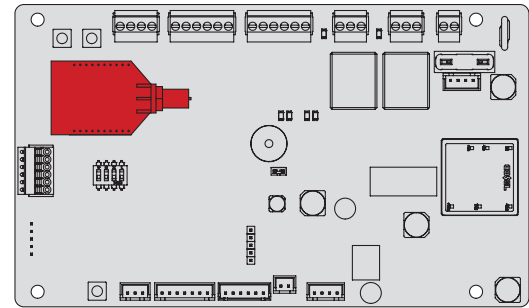


Figure 1: 30-522 Circuit Board

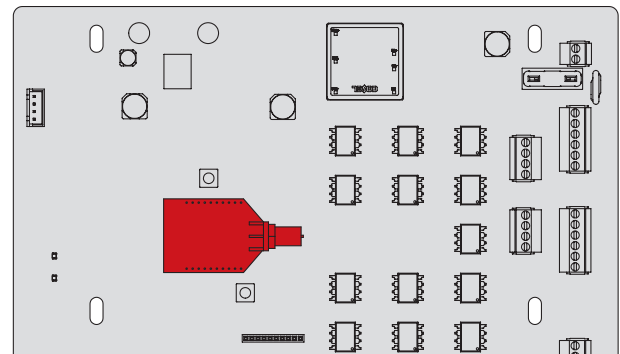


Figure 2: 30-524 Circuit Board

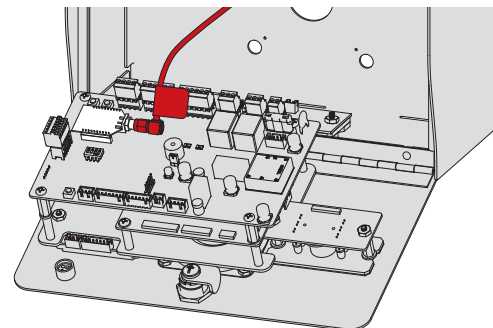


Figure 3: Connecting Antenna Cable



NEED
HELP

call
(972) 474-6422
or email
support@summitcontrol.com



SECURITY BRANDS™