

ASCENT linkCONTROLLER



37-LC1

WIRELESS MESH CONTROLLER FOR ASCENT

FEATURES

- Wireless mesh connectivity
- Control 1 gate/door
- 1 Wiegand input / 3 digital inputs
- Push and/or email event and status notifications
- Audit trail with detailed reports
- Cloud-based access control management



powered by  **SUMMIT CONTROL**

GET THE SUMMIT CONTROL APP



EXTREME VERSATILITY

These units are completely wireless, meaning they go wherever you need them.

MAXIMUM COMPATIBILITY

Connect gates, doors, and other access points to the network using industry standards like the 26-bit Wiegand interface.

PLUG AND PLAY

Easily install and connect Ascent Link units and then manage via Summit Control.

IMPROVES AS IT GROWS

As you build your mesh network outward, each additional Ascent Link unit improves the quality and reliability of the network.



SPECIFICATIONS

PHYSICAL

Dimensions 8.97"(H) x 7.09"(W) x 2.44"(D)
Shipping Weight 4 lbs.

ELECTRICAL

Input 12–24 VAC/DC
power supply not included
Current Draw less than 67 mA @ 12 VDC
less than 35 mA @ 24 VDC
at standby

RELAY

Contact Rating 3 A @ 30 VDC / 1 A @ 120 VAC
Variable Relay Time 1–9999 seconds


ENVIRONMENTAL

Operating Temperature -15 to 158 °F
Enclosure Rating IP65

MOUNTING

Three mounting slots spaced evenly along top ear and three mounting slots spaced evenly along bottom ear.

Mounting-slot pattern spacing 2.38"
Mounting-slot size .26" x 1.18"

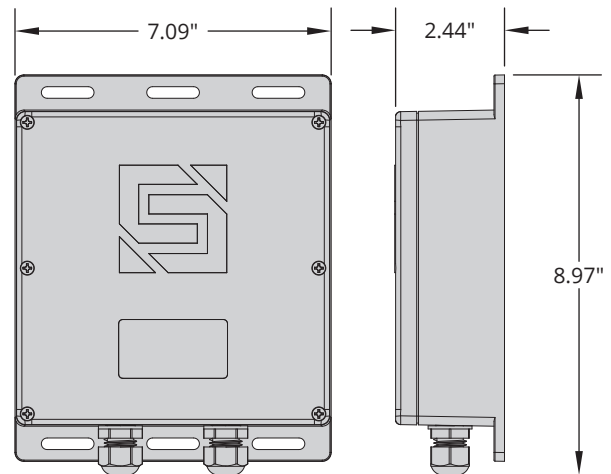

Unit includes two (2) pre-installed 3/8" NPT cable glands for wiring.




GET LINKED!

LINK UP WITH ASCENT LINK!

Install a starter kit and start building your mesh network right away.*

* A starter kit makes one Ascent cellular (primary) unit wireless-mesh-network ready.

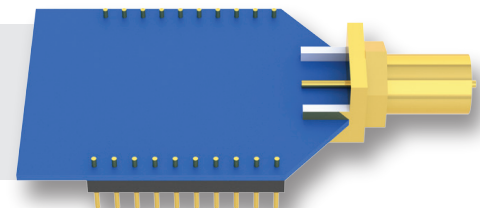

For more information, visit us online:
securitybrands.com

SECURITY BRANDS™