

ASCENT linkEXTEND



37-LE1

WIRELESS MESH RANGE EXTENDER FOR ASCENT

FEATURES

- Wireless mesh connectivity
- Adds 1,000 feet of wireless range
- Cloud-based access control management
- Durable PC-ABS construction
- IP65-rated enclosure



powered by  **SUMMIT CONTROL**

GET THE SUMMIT CONTROL APP



EXTREME VERSATILITY

These units are completely wireless, meaning they go wherever you need them.

MAXIMUM COMPATIBILITY

Connect gates, doors, and other access points to the network using industry standards like the 26-bit Wiegand interface.

PLUG AND PLAY

Easily install and connect Ascent Link units and then manage via Summit Control.

IMPROVES AS IT GROWS

As you build your mesh network outward, each additional Ascent Link unit improves the quality and reliability of the network.



SECURITY BRANDS



SPECIFICATIONS

PHYSICAL

Dimensions	8.00"(H) x 3.64"(W) x 2.36"(D)
Shipping Weight	2 lbs.

ELECTRICAL

Input	12–24 VAC/DC power supply not included
Current Draw	less than 67 mA @ 12 VDC less than 35 mA @ 24 VDC


ENVIRONMENTAL

Operating Temperature	-15 to 158 °F
Enclosure Rating	IP65

MOUNTING

Two mounting holes spaced evenly along top ear and two mounting holes spaced evenly along bottom ear.

Mounting-hole pattern spacing	2.05"
Mounting-hole size	.26"

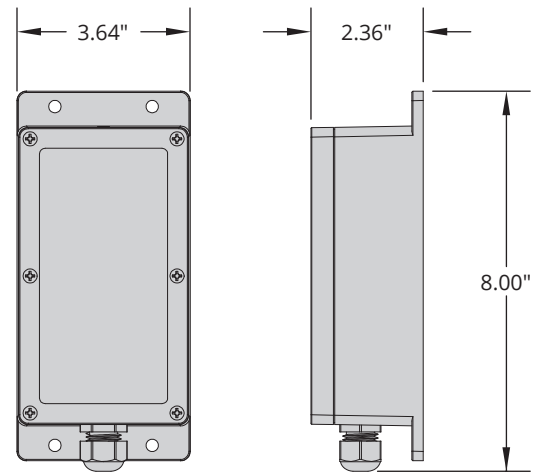

Unit includes one (1) pre-installed 3/8" NPT cable gland for wiring.




GET LINKED!

LINK UP WITH ASCENT LINK!

Install a starter kit and start building your mesh network right away.*

* A starter kit makes one Ascent cellular (primary) unit wireless-mesh-network ready.

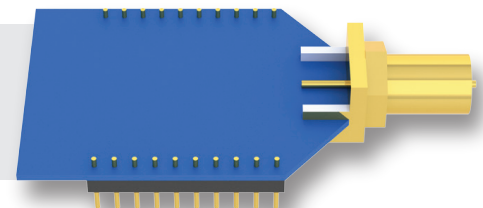

For more information, visit us online:
securitybrands.com

