

ASCENT M³



16-M3 COMPACT CELLULAR MULTI-TENANT ENTRY SYSTEM W/ 8-INCH TOUCHSCREEN

FEATURES

- Full cellular with automatic network selection
- Vibrant full-color 8-inch LCD touchscreen
- Video calling with IR for low light
- GuestPass time/use-limited QR-code quick access
- Control up to 2 gates/doors
- 2 Wiegand inputs
- Up to 10,000 app, text, and voice users*
- Up to 10,000 keypad codes stored locally on unit*
- Rollover calling—up to 3 phone numbers
- Push and/or email event and status notifications
- Cloud-based access control management
- LED downlight and LED-backlit buttons



* Maximum number is dependent on plan.

powered by  **SUMMIT CONTROL**



GET THE SUMMIT CONTROL APP



VERSATILE AND CONVENIENT

Manage the access control of a property from anywhere there's an internet connection.

AN ASCENT WITH A VIEW

Enjoy video calling with IR, giving you clear visual ID while you have a conversation with your guests, even in low light.

POWERFULLY EXPANDABLE

Network multiple Ascent units together and manage multiple entries via Summit Control.

COMPACT TOUCH INTERFACE

Everything can be done quickly and easily by touch alone—filter, find, and tap the desired party on the screen to call or enter a code.



SPECIFICATIONS

PHYSICAL

Dimensions	12.93"(H) x 6.75"(W) x 4.36"(D)
Shipping Weight	14 lbs.

ELECTRICAL

Input	24 VDC 24-VDC power supply included (PS-24DC3)
Current Draw	dependent on user settings Unit requires constant power source and is not recommended for solar applications

RELAY

Contact Rating	10 A @ 120 VAC / 24 VDC
Max Switching Voltage	250 VAC / 30 VDC
Max Switching Current	15 A
Max Switching Power	240 W / 2,770 VA

COMMUNICATION








Cellular Network	4G LTE
------------------	--------


ENVIRONMENTAL

Operating Temperature	-15 to 158 °F
-----------------------	---------------

CONTROL IT YOUR WAY

2nd
DOOR

-  APP
-  TEXT
-  VOICE
-  KEYPAD*
-  DIRECTORY
-  WIEGAND DEVICES
-  GUESTPASS (QR CODE)

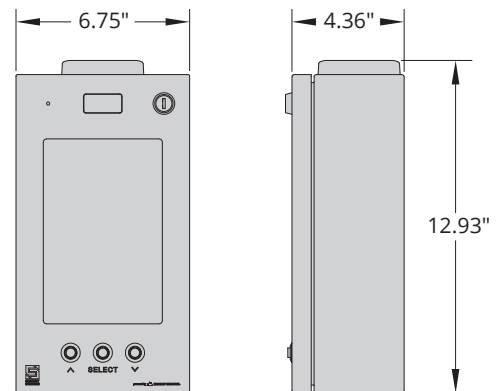

Hole pattern on back for pedestal mounting is spaced at 3.063" with pilot holes for alternate mounting at 2.5".

⚠ Actual voltage should be no more than 10% beyond specified range. Use of the included power supply is recommended.

GET STARTED NOW!

PAY JUST **ONE** BILL!†

Unit includes a SIM card preinstalled and ready for activation.

We do ALL the legwork for you!



SUMMIT CONTROL

visit summitcontrol.com



* Because keypad codes are managed via Summit Control, they cannot be added or deleted without an active service plan.

† Monthly bill covers cost of SIM card, actions gateway, servers, maintenance, development, mobile app, admin portal, and tech support.

For more information, visit us online:
securitybrandsinc.com



SECURITY BRANDS INC™