

ASCENT X¹



16-X1

CELLULAR TELEPHONE ENTRY SYSTEM WITH KEYPAD

FEATURES

- Full cellular with automatic network selection
- HD video calling with IR for low light
- Time/use-limited QR-code quick access
- Control up to 2 gates/doors
- 2 Wiegand inputs
- Up to 10,000 app, text, and voice users*
- Up to 10,000 keypad codes*
- Rollover calling—up to 3 phone numbers
- Broadcast calling—up to 10 phone numbers
- Push and/or email event and status notifications
- Cloud-based access control management
- LED downlight and LED-backlit buttons



* Maximum number is dependent on plan.

powered by  **SUMMIT CONTROL**
SIERRA

GET THE SUMMIT CONTROL SIERRA APP



VERSATILE AND CONVENIENT

Control your gate or door from anywhere using a computer, tablet, or phone.

AN ASCENT WITH A VIEW

Enjoy crisp HD video with IR, giving you clear visual ID while you have a conversation with your guests, even in low light.

POWERFULLY EXPANDABLE

Network multiple Ascent units together and manage multiple entries via Summit Control.

GET CONNECTED EVERY TIME

Assign multiple phone numbers to be called in order or simultaneously upon call button press, ensuring a connection is always made.



SPECIFICATIONS

PHYSICAL

Dimensions	6.68"(H) x 10.00"(W) x 5.25"(D)
Shipping Weight	8 lbs.

ELECTRICAL

Input	12–24 VDC 12-VDC power supply included (PS-12DC2)
Current Draw	less than 330 mA @ 12 VDC less than 160 mA @ 24 VDC with relays latched and LED components on

RELAY

Contact Rating	10 A @ 120 VAC / 24 VDC
Max Switching Voltage	250 VAC / 30 VDC
Max Switching Current	15 A
Max Switching Power	240 W / 2,770 VA

COMMUNICATION








Cellular Network	4G LTE
------------------	--------


ENVIRONMENTAL

Operating Temperature	-15 to 158 °F
-----------------------	---------------

CONTROL IT YOUR WAY

2⁺
DOOR

-  APP
-  TEXT
-  VOICE
-  KEYPAD*
-  CALL BUTTON
-  WIEGAND DEVICES
-  QR CODE

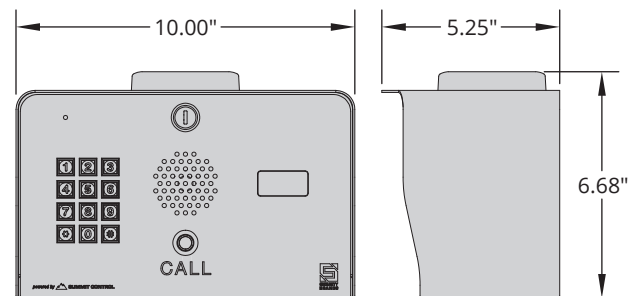

Hole pattern on back for pedestal mounting is spaced at 3.063" with pilot holes for alternate mounting at 2.5".

⚠ Actual voltage should be no more than 10% beyond specified range. Use of the included 12-VDC power supply is recommended.

GET STARTED NOW!

PAY JUST ONE BILL!*

Unit includes a SIM card preinstalled and ready for activation.

We do ALL the legwork for you!



SUMMIT CONTROL

[visit summitcontrol.com](http://visit.summitcontrol.com)



* Because keypad codes are managed via Summit Control, they cannot be added or deleted without an active service plan.

† Monthly bill covers cost of SIM card, actions gateway, servers, maintenance, development, mobile app, admin portal, and tech support.

For more information, visit us online:
securitybrandsinc.com



SECURITY BRANDS INC™