

RTE HW



14-RTEHW

HARDWIRED REQUEST-TO-EXIT STATION

FEATURES

- IP65-rated push button
- Lockout key switch
- Control 1 device
- Simple wiring with no power requirement
- Polycarbonate construction



BUILT TO LAST

Durable polycarbonate construction allows this unit to brave the elements.

SIMPLE WIRING

Connect to any free exit and common terminals on your gate operator, and you're ready to go. No power needed.

SOLAR FRIENDLY

This unit runs without any power, meaning it gets along with your solar gate operator.

QUICK AND EASY LOCKOUT

It's as simple as turning a key. If you're taking a trip and will be away for awhile, disable the unit with the convenient lockout key switch.



SPECIFICATIONS


PHYSICAL

Dimensions 5.74"(H) x 4.87"(W) x 4.73"(D)
Shipping Weight 2 lbs.

ENVIRONMENTAL

Operating Temperature -15 to 175 °F


MOUNTING

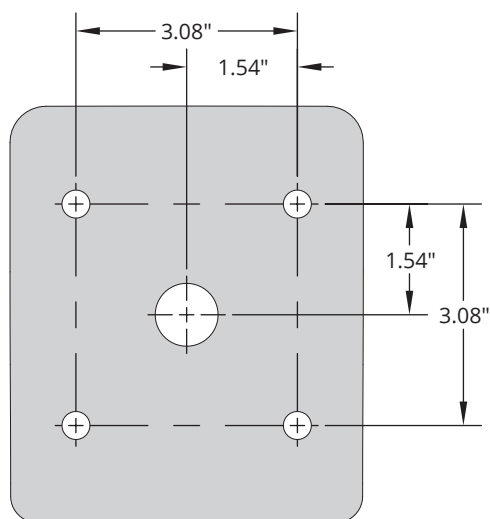

HOLE SIZES

Wiring pass through 0.88"
Mounting holes (x4) 0.38"

Unit includes mounting hardware.

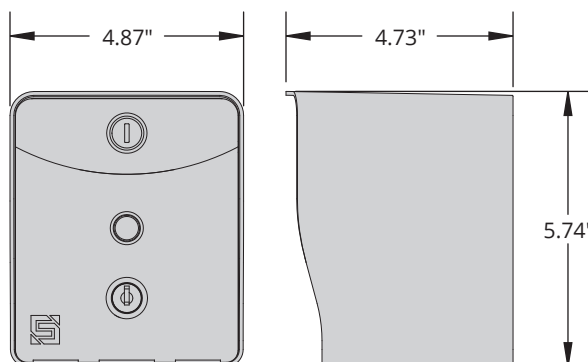

OTHER RTE PRODUCTS



14-RTE433

Ridge RTE Kit
433-MHz RTE Station and Transceiver



14-RTE300

RTE 300
300-MHz Request-to-Exit Station



58-RTE-P

RTE P
Post-Mount Touchless RTE Station

For more information, visit us online:
securitybrands.com

