

# SECURE<sub>PASS</sub> TR



## 40-TR1

## MID-RANGE WIEGAND VEHICLE TAG READER

### FEATURES

- Control 1 gate
- 26-bit Wiegand protocol
- Reads all types of UHF tags
- Read range up to 20 feet (6 meters)
- Audible-tone and LED feedback
- Brackets for mounting to post or surface
- IP65 weather rating for outdoor use
- Durable PC-ABS construction

### WORKS WITH

- Ascent family (select models)
- Edge family
- Other 26-bit Wiegand controllers



### SIMPLY CONVENIENT

We offer adhesive windshield tags for true convenience. Just stick it and forget it.

### INDUSTRY STANDARD

Taking advantage of the industry standard Wiegand protocol, our tag reader will work with any 26-bit Wiegand controller.

### GOES WHERE YOU NEED IT

Mount it to a post, mast arm, wall, or other surface. There's a bracket for that.

### TOUGH AND DURABLE

Durable construction and a rugged sealed-case design allow this tag reader to endure the elements for years to come.



## SPECIFICATIONS

### PHYSICAL

Dimensions\* 8.19"(H) x 8.19"(W) x 2.29"(D)  
Shipping Weight 5 lbs.

### ELECTRICAL

Input 12-24 VDC  
supplied by Wiegand controller

### COMMUNICATION


Wiegand Format 26 bit  
Wiring 18-inch pigtail

### ENVIRONMENTAL

Operating Temperature -40 to 167 °F  
Enclosure Rating IP65

\* Does not include cabling or cable gland

## CONNECTIVITY




## AVAILABLE CREDENTIALS




**SECUREPASS W TAG**  
RFID Windshield Tag  
**40-TW**  
(available in packs of 25)

## DIMENSIONS

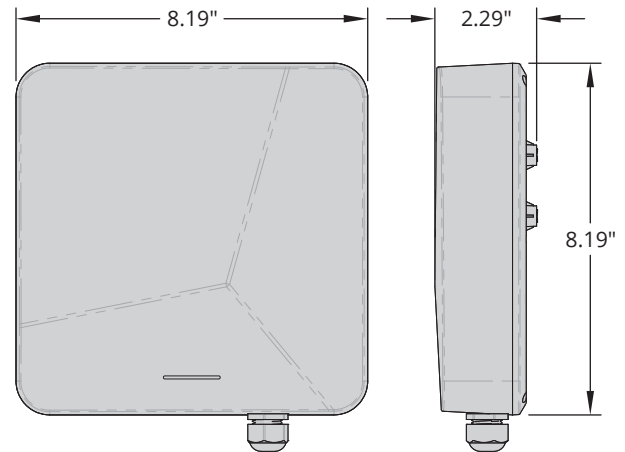


## MOUNTING



### POST-MOUNT BRACKET

Allows up to 30 degrees of vertical pitch



### SURFACE-MOUNT BRACKET

Allows wide angle of swivel vertically and horizontally

For more information, visit us online:  
**securitybrands.com**

