

TRICKLE CHARGER



56-TC38 3.8-AMP SMART CHARGER FOR 12-VOLT BATTERIES

FEATURES

- Charges and maintains most 12-volt batteries*
- Overcharge, short-circuit, overheat protection
- Easy-to-read LCD
- LED status feedback
- IP65-rated case
- Heavy-duty polycarbonate construction

INCLUDES

- Cable with ring terminals (6.5-foot length)
- Cable with alligator clips (6.5-foot length)
- Teks screws (4x)



* AGM, gel, lead-acid, SLA, VLA, VRLA, and wet batteries only

BUILT TOUGH

Durable polycarbonate-and-rubber construction with an IP65-rated case and corrosion-resistant contacts.

KEEP YOUR BATTERY HAPPY

This charger prevents overcharging and overheating via automatic smart charging, so you and your battery stay happy.



SPECIFICATIONS

PHYSICAL

Dimensions (Case)	7.18" (L) x 2.71" (W) x 1.84" (H)
Shipping Weight	2 lbs.

ELECTRICAL

Input Voltage	110–120 / 220–240 VAC 60 Hz / 50 Hz
Output Voltage	12 VDC
Max Charging Voltage	14.7 VDC
Max Charging Current	3.8 A ± 10%

ENVIRONMENTAL

Operating Temperature	32 to 104 °F
Enclosure Rating	IP65



i Mounting hardware is included.

MOUNTING

Two mounting holes spaced evenly along one end and two mounting holes spaced evenly along other end.

Mounting-hole spacing **6.75" x 1.88"**

Mounting-hole size **.16"**

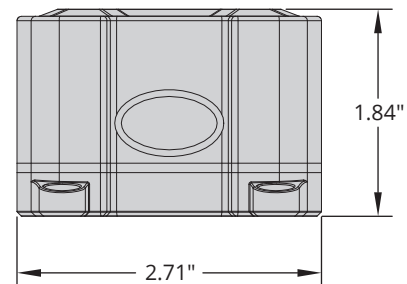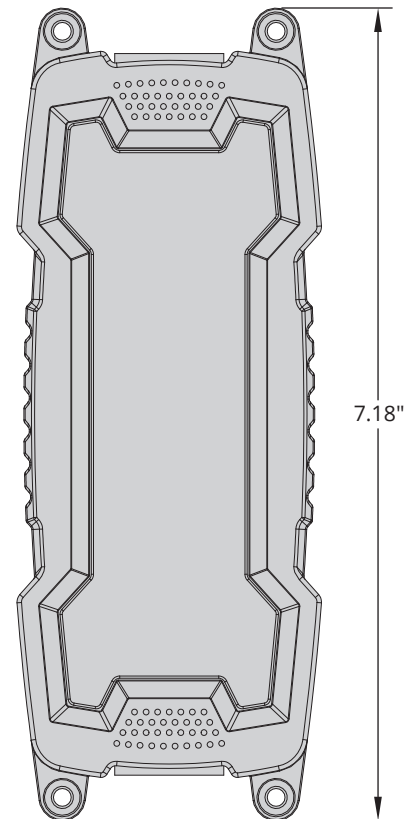

For more information, visit us online:
securitybrands.com

