


START HERE

1


Unpack box and make sure you have all items shown here.




Fire Access Box



Cable Release
Link



Pull Cable



Pull Handle



Conduit Fitting
(2x)



Hole Plug
(2x)




Cable Crimp
(4x)

Conduit is NOT included. We recommend using Electrical Metallic Tubing (EMT) over rigid conduit due to ease of forming.


2

Decide on positions of fire access box and cable release link, and consider conduit (EMT) placement. Fire access box should be mounted somewhere easily accessible.

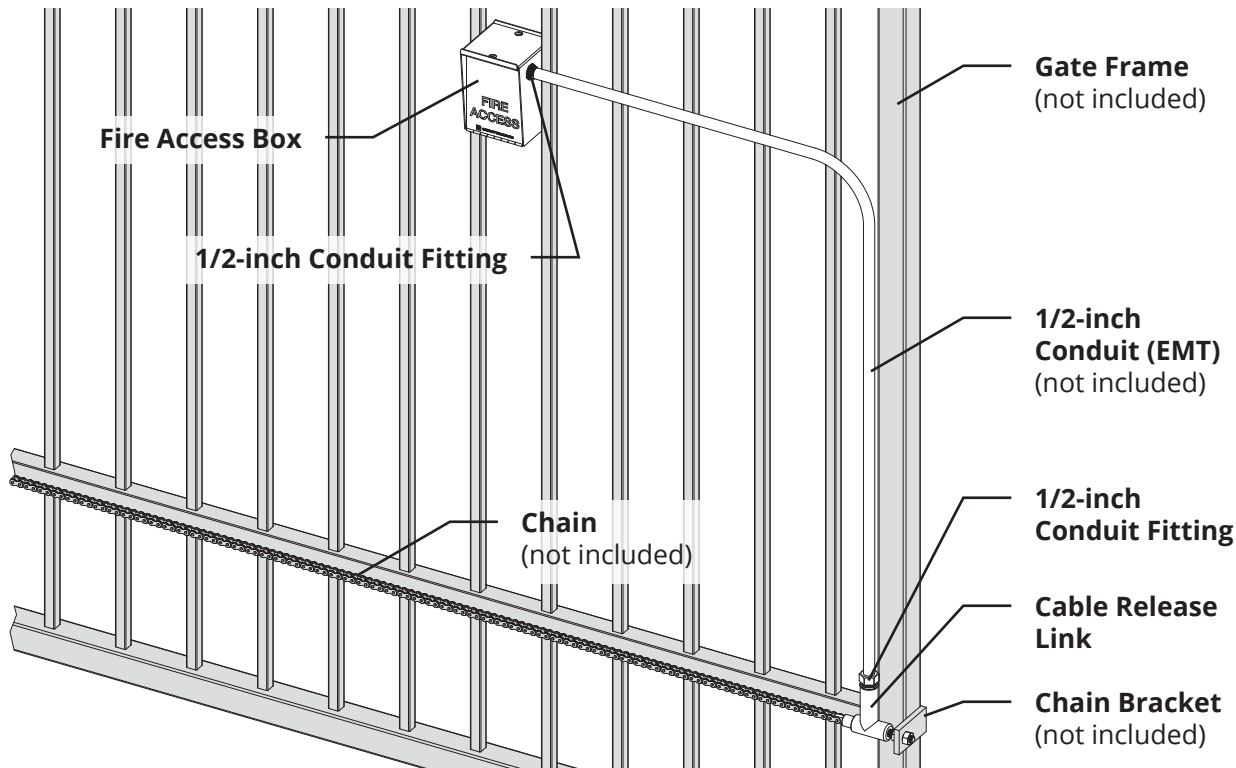

3


Secure cable release link to chain bracket, and secure chain to other end of cable release link as shown.

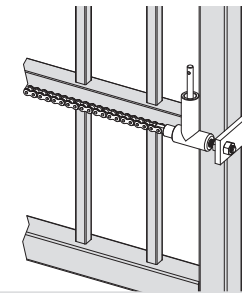

Note orientation of cable release link.

4

Form 1/2-inch conduit to size and shape, as required, and connect to fire access box with conduit fitting.

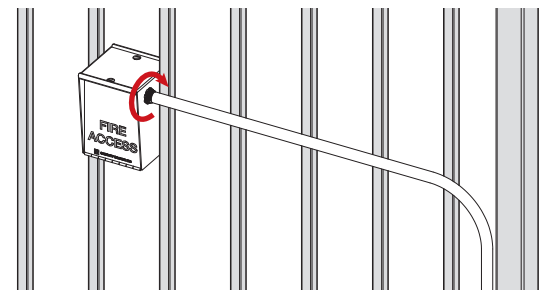


INSTALL GUIDE | FIRE ACCESS BOX

2 of 2

Model 15-015


5

Feed pull cable from fire access box through conduit, thread through cable release link release mechanism, and secure with cable crimp as shown.

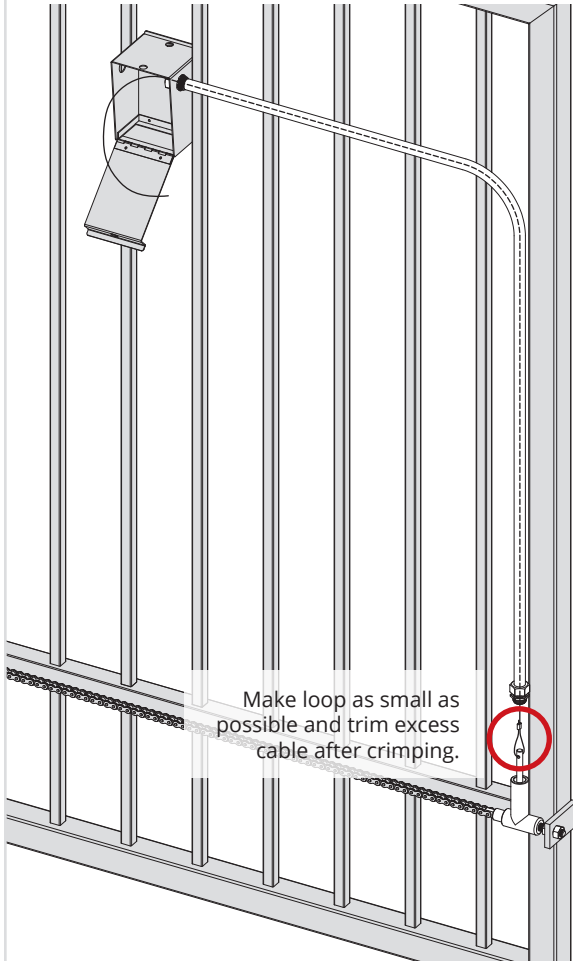


6

Fasten conduit fitting onto cable release link.

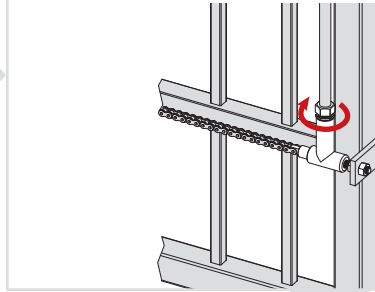


7

Feed pull cable through pull handle, and secure with cable crimp as shown. (Make loop as small as possible, and trim excess cable after crimping.)

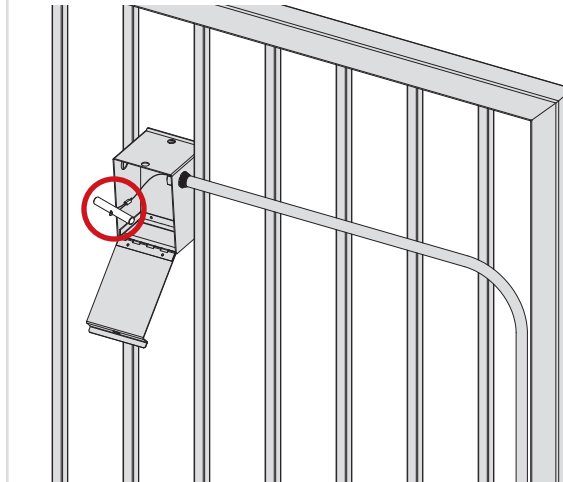

8

Plug open hole with hole plug, and secure both doors with suitable padlocks (e.g., Knox padlock).

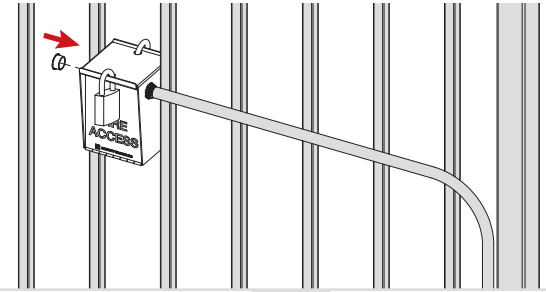

INSTALLATION COMPLETE!

For more resources, scan QR code:



NEED HELP



Call (972) 474-6390

Email techsupport@securitybrandsinc.com

We are available **Mon-Fri / 8am-5pm Central**



SECURITY BRANDS INC.
your *partner* in access control